

## The polar form

### Introduction.


From an Argand diagram the **modulus** and the **argument** of a complex number, can be defined. These provide an alternative way of describing complex numbers, known as the **polar form**. This leaflet explains how to find the modulus and argument.

### 1. The modulus and argument of a complex number.

The Argand diagram below shows the complex number  $z = a + bj$ . The distance of the point  $(a, b)$  from the origin is called the **modulus**, or **magnitude** of the complex number and has the symbol  $r$ . Alternatively,  $r$  is written as  $|z|$ . The modulus is never negative. The modulus can be found using Pythagoras' theorem, that is

$$|z| = r = \sqrt{a^2 + b^2}$$

The angle between the positive  $x$  axis and a line joining  $(a, b)$  to the origin is called the **argument** of the complex number. It is abbreviated to  $\arg(z)$  and has been given the symbol  $\theta$ .



We usually measure  $\theta$  so that it lies between  $-\pi$  and  $\pi$ , (that is between  $-180^\circ$  and  $180^\circ$ ). Angles measured anticlockwise from the positive  $x$  axis are conventionally positive, whereas angles measured clockwise are negative. Knowing values for  $a$  and  $b$ , trigonometry can be used to determine  $\theta$ . Specifically,

$$\tan \theta = \frac{b}{a} \quad \text{so that} \quad \theta = \tan^{-1} \left( \frac{b}{a} \right)$$

but care must be taken when using a calculator to find an inverse tangent that the solution obtained is in the correct quadrant. Drawing an Argand diagram will always help to identify the correct quadrant. The position of a complex number is uniquely determined by giving its modulus and argument. This description is known as the **polar form**. When the modulus and argument of a complex number,  $z$ , are known we write the complex number as  $z = r\angle\theta$ .

Polar form of a complex number with modulus  $r$  and argument  $\theta$ :

$$z = r\angle\theta$$

### Example


Plot the following complex numbers on an Argand diagram and find their moduli.

a)  $z_1 = 3 + 4j$ ,      b)  $z_2 = -2 + j$ ,      c)  $z_3 = 3j$

### Solution

The complex numbers are shown in the figure below. In each case we can use Pythagoras' theorem to find the modulus.

a)  $|z_1| = \sqrt{3^2 + 4^2} = \sqrt{25} = 5$ ,    b)  $|z_2| = \sqrt{(-2)^2 + 1^2} = \sqrt{5}$  or 2.236,    c)  $|z_3| = \sqrt{3^2 + 0^2} = 3$ .

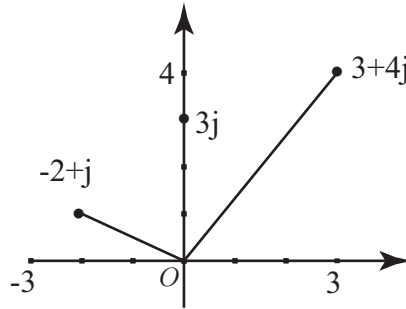


### Example

Find the arguments of the complex numbers in the previous example.

### Solution

a)  $z_1 = 3 + 4j$  is in the first quadrant. Its argument is given by  $\theta = \tan^{-1} \frac{4}{3}$ . Using a calculator we find  $\theta = 0.927$  radians, or  $53.13^\circ$ .

b)  $z_2 = -2 + j$  is in the second quadrant. To find its argument we seek an angle,  $\theta$ , in the second quadrant such that  $\tan \theta = \frac{1}{-2}$ . To calculate this correctly it may help to refer to the figure below in which  $\alpha$  is an acute angle with  $\tan \alpha = \frac{1}{2}$ . From a calculator  $\alpha = 0.464$  and so  $\theta = \pi - 0.464 = 2.678$  radians. In degrees,  $\alpha = 26.57^\circ$  so that  $\theta = 180^\circ - 26.57^\circ = 153.43^\circ$ .

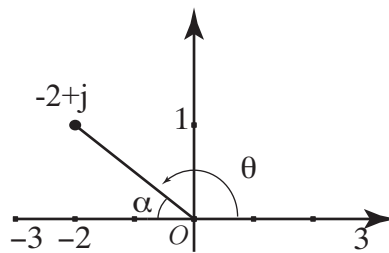

c)  $z_3 = 3j$  is purely imaginary. Its argument is  $\frac{\pi}{2}$ , or  $90^\circ$ .

### Exercises

1. Plot the following complex numbers on an Argand diagram and find their moduli and arguments.

a)  $z = 9$ ,      b)  $z = -5$ ,      c)  $z = 1 + 2j$ ,      d)  $z = -1 - j$ ,      e)  $z = 8j$ ,      f)  $-5j$ .

### Answers

1. a)  $|z| = 9$ ,  $\arg(z) = 0$ ,    b)  $|z| = 5$ ,  $\arg(z) = \pi$ , or  $180^\circ$ ,    c)  $|z| = \sqrt{5}$ ,  $\arg(z) = 1.107$  or  $63.43^\circ$ ,  
d)  $|z| = \sqrt{2}$ ,  $\arg(z) = -\frac{3\pi}{4}$  or  $-135^\circ$ ,    e)  $|z| = 8$ ,  $\arg(z) = \frac{\pi}{2}$  or  $90^\circ$ ,    f)  $|z| = 5$ ,  $\arg(z) = -\frac{\pi}{2}$  or  $-90^\circ$ .